



Frequency Generator


Pneumatically controlled timer/flow control

FEATURES

- Pneumatic operation allows for use as a fully-manual applicator
- Solenoid control of air flow allows for integration with machine controls
- Fully adjustable between 12 and 120 strokes/minute (up to 3.5oz/8 hour shift per pump)
- 9707 is compatible with Accu-Lube® Box Applicator
- 9460 is compatible with Accu-Lube® Junior Applicator

APPLICATIONS

- Where delivery of precise amounts of lubricant to any externally-lubricated application is needed, such as:
 - Turning
 - Tapping
 - etc.
- Milling
- Drilling
- Sawing (band & circular)

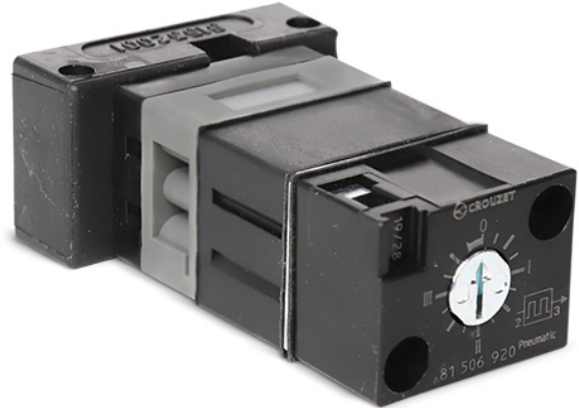

DIRECTIONS

See installation instructions for replacement, set-up, and operation of frequency generators

HANDLING

Follow standard industrial hygiene practices for handling components and fittings.

STORAGE

Keep in original packaging until ready to install to avoid losing/misplacing fittings or other parts.

DISPOSAL

Dispose of in accordance with local regulations.

AVAILABLE PRODUCTS

Part No.	Container Type	Units/Case
9707	for Box Applicator (with baseplate)	1
9460	for Junior Applicator (no Base)	1



CONTACT YOUR ITW PRO BRANDS REPRESENTATIVE TODAY!

800.241.8334 | www.itwprobrands.com

LPS®, SCRUBS®, DYKEM®, Accu-Lube®, DYMON®, Spray Nine®, and Cedar® are registered trademarks and Rustlick™, Diamondkote™, and MetalMates™ are trademarks of Illinois Tool Works • All Rights Reserved